

## Hall Effect Base Linear Current Sensor

### Features:

- Low noise analog signal path
- 8.3 mΩ internal conductor resistance
- Output voltage proportional to AC and DC current
- Min. sensing current 0~5.0A at 5V voltage supply
- High Sensitivity 260 mV/A
- Wide operating voltage range 3.0~12 V.
- Low operating current 3mA
- Nearly zero magnetic hysteresis.
- Ratiometric output from supply voltage
- 10K Hz bandwidth




### Functional Description :

The Winson WCS2705 provides economical and precise solution for both DC and AC current sensing in industrial, commercial and communications systems. The unique package allows for easy implementation by the customer. Typical applications include motor control, load detection and management, over-current fault detection and any intelligent power management system etc...

The WCS2705 consists of a precise, low-temperature drift linear hall sensor IC with temperature compensation circuit and a current path with 8.3 mΩ typical internal conductor resistance. This extremely low resistance can effectively reduce power loss, operating temperature and increase the reliability greatly. Applied current flowing through this conduction path generates a magnetic field which is sensed by the integrated Hall IC and converted into a proportional voltage.



The terminals of the conductive path are electrically isolated from the sensor leads. This allow the WCS2705 current sensor to be used in applications requiring electrical isolation without the use of opto-isolators or other costly isolation techniques and make system more competitive in cost.

Winson reserves the right to make changes to improve reliability or manufacturability.

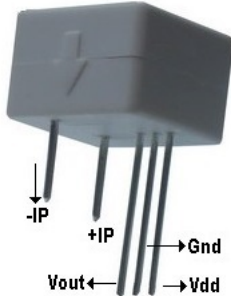


**ABSOLUTE MAXIMUM RATING**

Supply Voltage, Vdd	14V
Pass Current, IP	8 A
Pass Current (10ms pulse) Ipulse	20A
Output Current Sink	0.4mA
Output Current Source	2mA
Conductor Isolation Voltage	1000 V
Operating Temperature Range	
Ta	-20°C to +125°C
Storage Temperature Range	
Ts	-65°C to +150°C
Power Dissipation Pd	1 W

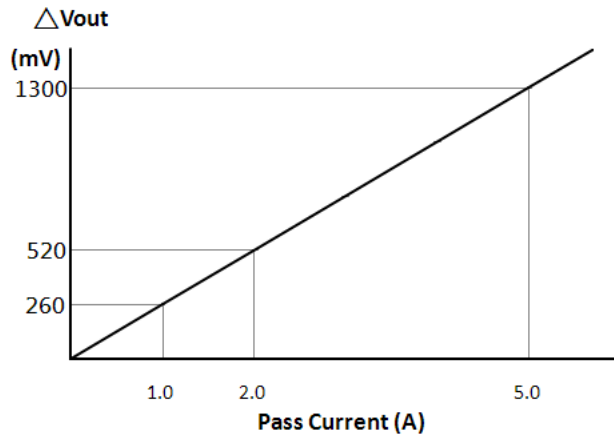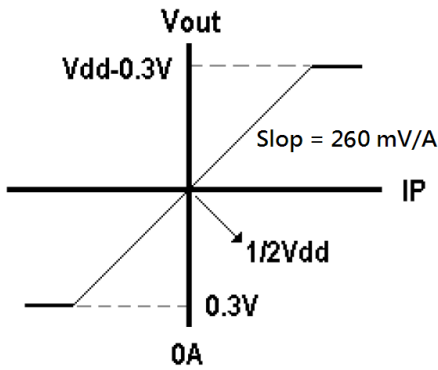

**Function Block:**


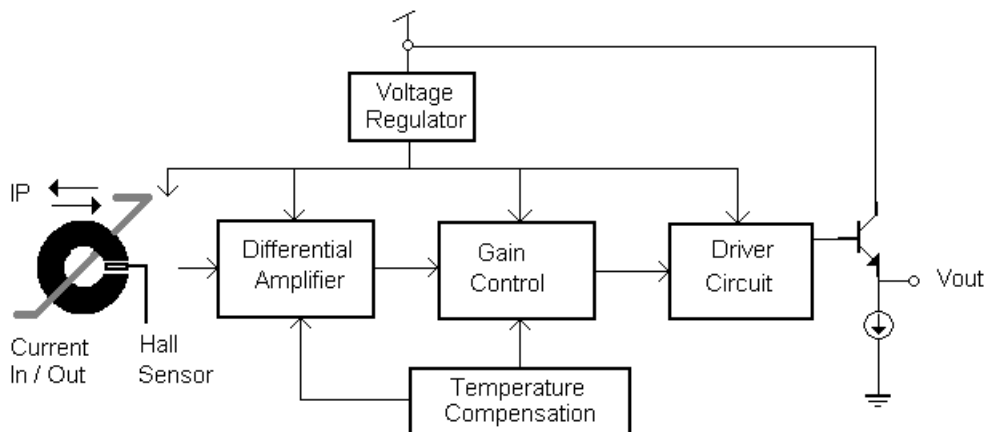


Winson reserves the right to make changes to improve reliability or manufacturability.





**Electrical Characteristics:**
**(T=+25°C, Vdd=5.0V)**

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Supply Voltage	Vdd	—	3.0	—	12	V
Supply Current	I <sub>supply</sub>	IP = 0 A	—	3.5	6.0	mA
Zero Current Vout	V <sub>0G</sub>	IP = 0 A	2.4	2.5	2.6	V
Primary Conductor Resistance	R <sub>primary</sub>	IP = 5 A	—	8.3	—	mΩ
Sensitivity	ΔV <sub>out</sub>	IP = ± 5.0 A	220	260	300	mV/A
Bandwidth	BW	—	—	10	—	kHz
Measurable Current Range	MCR	Vdd=5V (DC Mode)	—	±7.5	—	A
		Vdd=5V (AC RMS)	—	5.0	—	
Temperature Drift	ΔV <sub>out</sub>	IP = 0 A	—	±0.5	—	mV/°C
Output Noise	V <sub>Np-p</sub>	IP = 0 A	—	7.5	—	mV
	V <sub>Np-p(0.01uF)</sub>	IP = 0 A, C = 0.01uF	—	1	—	

1. All output-voltage measurements are made with a voltmeter having an input impedance of at least 100kΩ
2. Do not apply any 'resistor load' on output pin, it will degrade IC's performance.

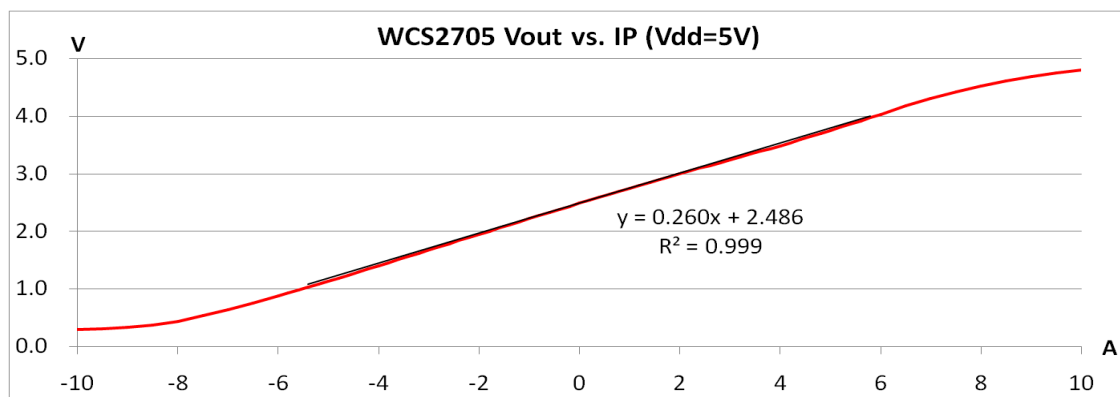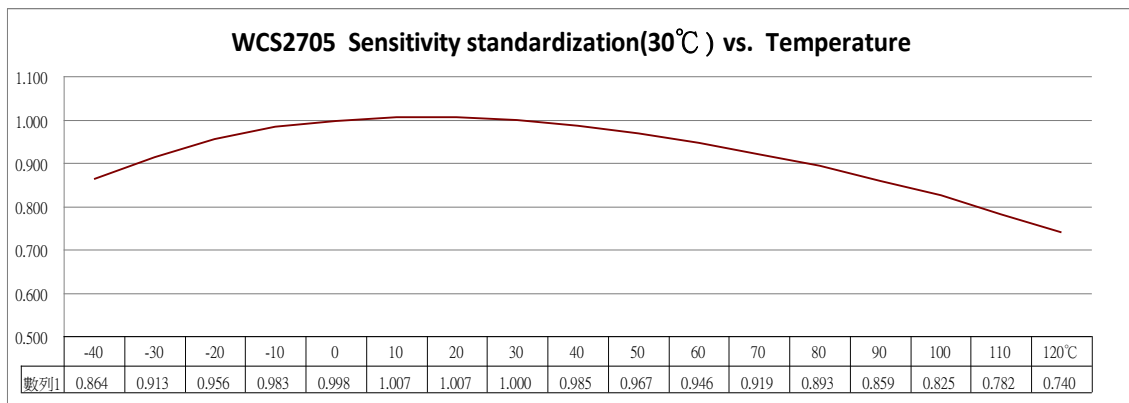**Electrical Diagram:**


Winson reserves the right to make changes to improve reliability or manufacturability.

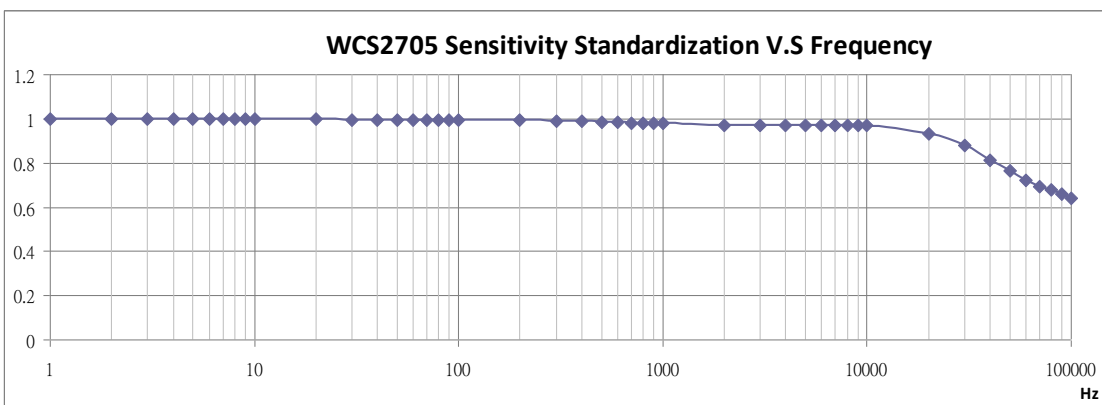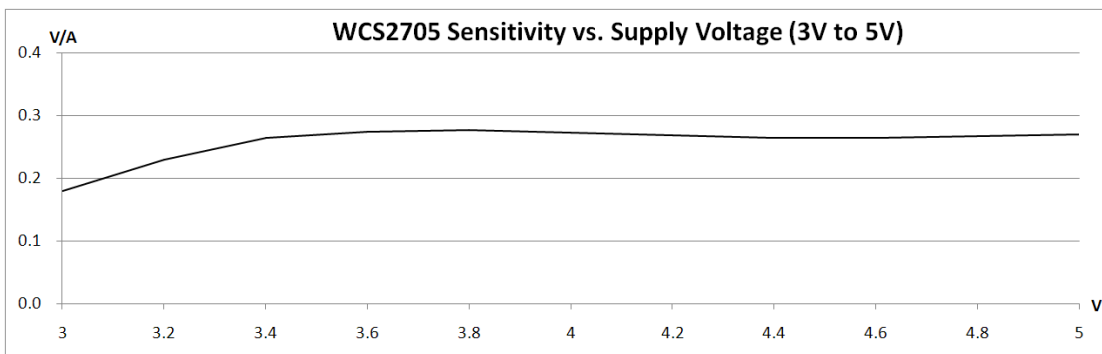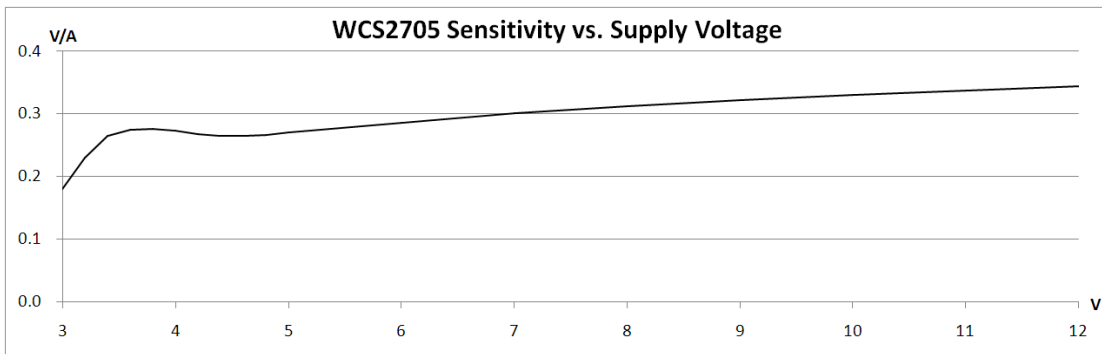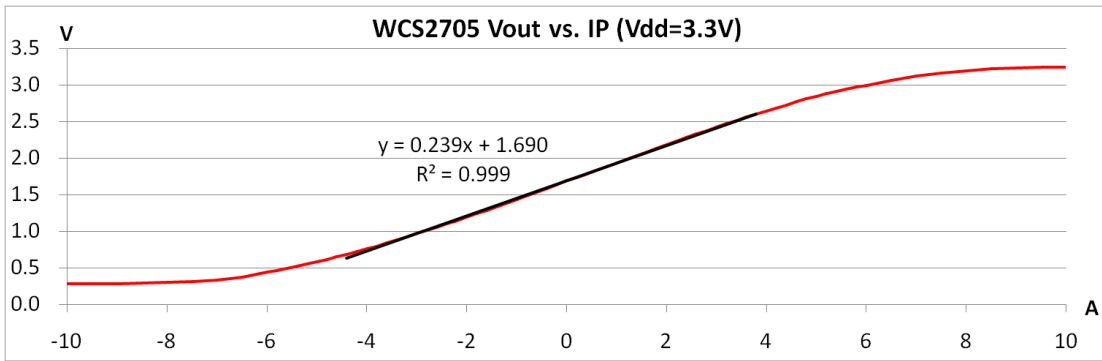

Winson reserves the right to make changes to improve reliability or manufacturability.

