

---

Unipolar Hall Effect Switch IC
--------------------------------

## Features:

- Operates from 2.4V to 20V supply voltage
- Operates with magnetic fields from DC to 15kHz
- On-chip Hall Sensor and pull-high resistor
- On-chip temperature compensation circuitry minimizes shifts in on and off points and hysteresis over temperature and supply voltage
- Ideal sensor for speed measurement, revolution counting, positioning
- Off (High) with magnetic **North** pole and On (Low) **without** magnetic field or with magnetic **South** pole

## Functional Description :

WSH1132 is designed to integrate Hall sensor with output driver together on the same chip, it is suitable for speed measurement, revolution counting, positioning. It includes a temperature compensated voltage regulator, a differential amplifier, a Hysteresis controller and a output driver capable of sinking up to 20mA current load. An on-chip protection resistor is implemented to prevent reverse power fault.

The temperature-dependent bias increases the supply voltage of the hall plates and adjusts the switching points to the decreasing induction of magnets at higher temperatures. Subsequently, the output can keep switching on/off on more precise switch point regardless to the ambient temperature. WSH1132 are rated for operation over temperature range from  $-20^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  and voltage ranges from 2.4V to 20V.

## Pin Descriptions:

Name	P/I/O	Pin#	Description
Vdd	P	1	Positive Power Supply
Gnd	O	2	Ground
Vout	O	3	Output Pin


Winson reserves the right to make changes to improve reliability or manufacturability.

**Absolute Maximum Rating (at Ta=25° C)**

Supply Voltage	Vcc -----	24V
Output breakdown Voltage	Vout <sub>(breakdown)</sub> -----	24V
Magnetic flux density	B -----	Unlimited
Output ON Current (continuous)	Ic -----	25 mA
Operating Temperature Range	Ta -----	(-20°C to +125°C)
Storage Temperature Range	Ts -----	(-65°C to +150°C)
Package Power Dissipation	Pd -----	500mw

**Electrical Characteristics: (T=+25°C, Vcc=2.4V to 20V)**

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Supply Voltage	Vcc	—	2.4	—	20	V
Output Saturation Voltage	Vout (sat)	Vcc=12V, Ic=10mA B = 0 Gauss	—	0.2	0.6	V
Output Leakage Current	Ileakage	Vcc=12V, B> Bop	—	<0.1	10	uA
Supply Current	Isupply	Vcc=12V, B=0 G	—	2.2	5	mA

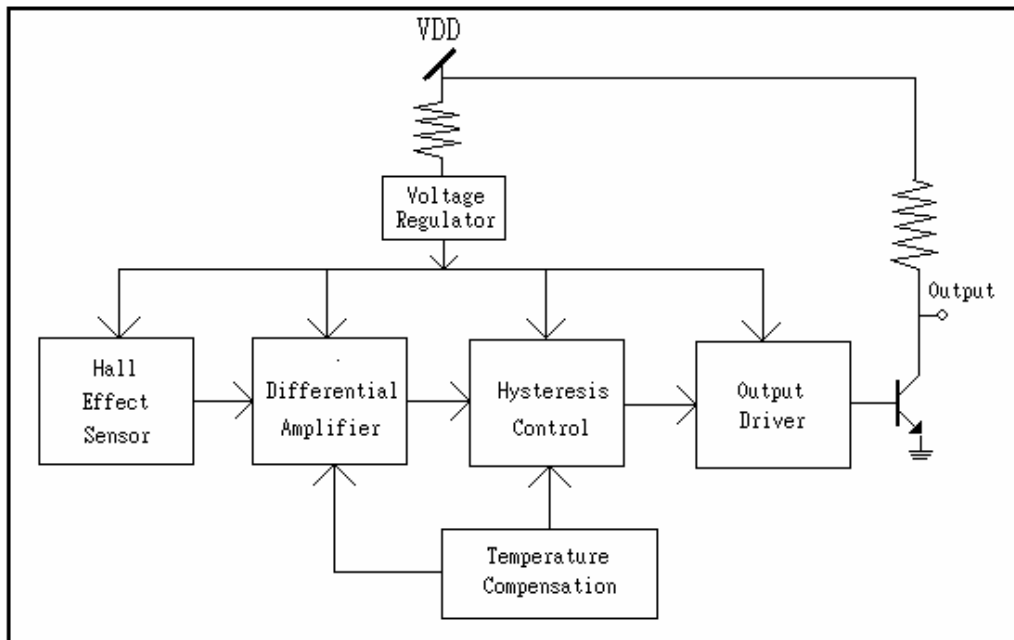**Function Block:**


Winson reserves the right to make changes to improve reliability or manufacturability.

## Magnetic Characteristics:

(T=+25°C, Vcc=12V)



Characteristic	Symbol	Grade	Min.	Typ.	Max.	Unit
Operating Point	Bop	A		-80	-100	Gauss
		B		-150	-200	Gauss
		C		-200	-250	Gauss
Release Point	Brp	A	-30			Gauss
		B	-30			Gauss
		C	-30			Gauss
Hysteresis Window	Bhys			12	30	Gauss

\* - mean North magnetic field, 1mT=10 Gauss

## Order Information:

WSH1132 -XPAN □ (TO-92 )	Grade: 1: 100 Gauss 2: 200 Gauss 3: 250 Gauss
WSH1132 -XPCN □ (SOT23)	
↑ Grade	


## Application Circuit:

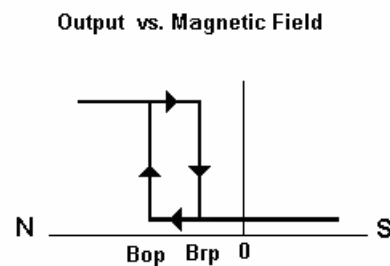


Winson reserves the right to make changes to improve reliability or manufacturability.

Package Information:

**TO-92S:**

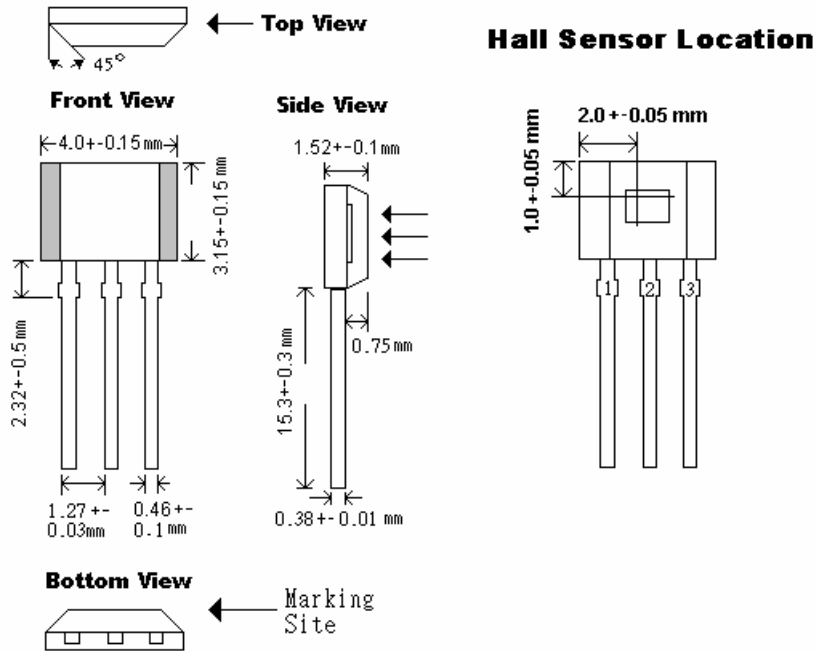

**SOT-23:**

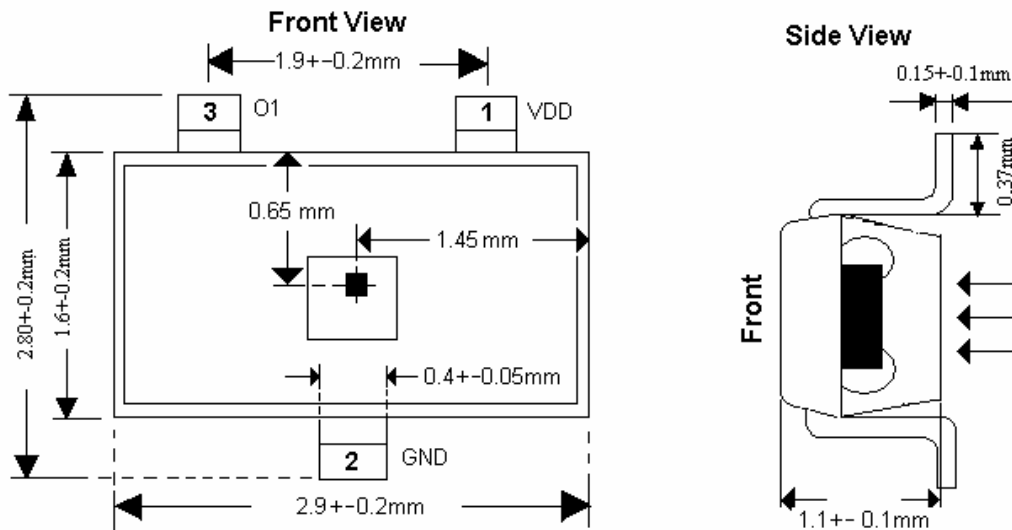

Winson reserves the right to make changes to improve reliability or manufacturability.