

#### **Linear Hall Effect Sensor IC**


#### Features:

- Wide operating range 3.0~12V, -40°C ~125°C
- Flat Response to 23kHz
- High Sensitivity 4.5mV/G
- Wide sensible magnetic field range on different supplied voltage
  ±450 Gauss on 5V supplied voltage
  ±1,000 Gauss on 12V supplied voltage. Low operating current 3mA
- Two package styles TO-92S/SOT-23 available.
- Built-in temperature compensated circuit to minimize temperature's effect

### **Functional Description:**


The W137 integrates Hall sensing element, linear amplifer, sensitivity controller and emitter follower output stage. It accurately tracks extremely small change in magnetic flux density –generally too small to operate Hall effect switch.

W137 can be applied as current sensor, tooth sensor, proximity detectors and motion detectors. As sensitive monitor of magnetic flux, it can effectively measure a system's performance with negligible system loading while providing isolation from contaminated and electrically noisy environments.

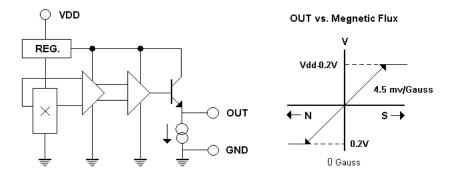





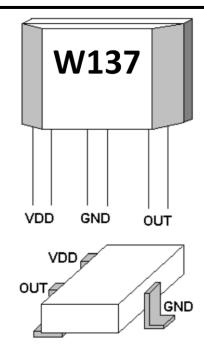

### Absolute Maximum Range

Supply Voltage, Vdd 14V
Magnetic Flux Density, B Unlimited
Output Driving Current, lout 0.4mA
Operating Temperature Range, Ta
Storage Temperature Range, Ts
Power Dissipation, Pd
TO-92S <b>500mW</b>
SOT-23 400mW

#### **Order Information**

WSH137-XPAN□ (TO-92S) WSH137-XPCN□ (SOT-23)	1: A Grade 2: B Grade
<b>↑</b> Grade	
Halogen Free	

 $\bigstar$ TO-92S - 1,000/bag , SOT-23 - 3,000/reel


#### **Electrical Characteristics:**

(T=+25°C, Vdd=5.0V)

Characteristic	Symbol	Test Conditions	Min	Тур	Max	Units
Supply Voltage	Vcc	_	3.0	_	12	V
Supply Current	Isupply	B=0 Gauss		3.0	5.0	mA
Quiescent Vout	V0G	B=0 G (A Grade)	2.45	2.5	2.55	V
		B=0 G (B Grade)	2.4	2.5	2.6	
Sensitivity	△Vout	B= 0 to ± 400 G	4.0	4.5	5.0	mV/G
Bandwidth	BW	_	_	23	_	kHz
Measurable Guass	MGR	Vdd=5V	_	±450	_	Gauss
Range		Vdd=12V	_	±1000	_	
Temperature Drift	△Vout	B=0 Gauss	_	±0.5	_	mV/°C
Output Noise	$V_{Np-p}$	_	_	7.5	_	mV


- 1.All output-voltage measurements are made with a voltmeter having an input impedance of at least  $100 k\Omega$
- 2. Do not apply any 'resistor load' on output pin, it will degrade IC's performance.

### **Application circuit:**

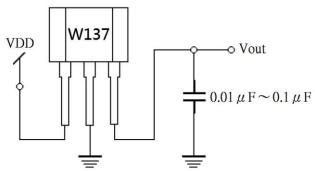




# **Hall Device Sensing Direction**

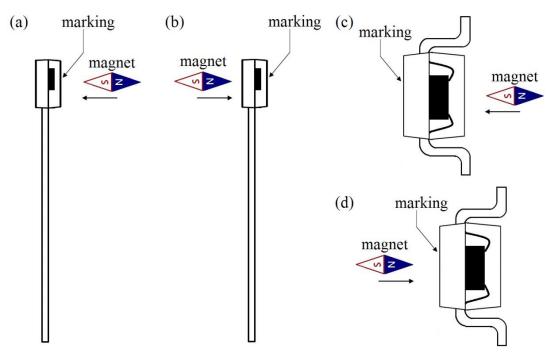

# **Package Information**


### **《TO-92S》**

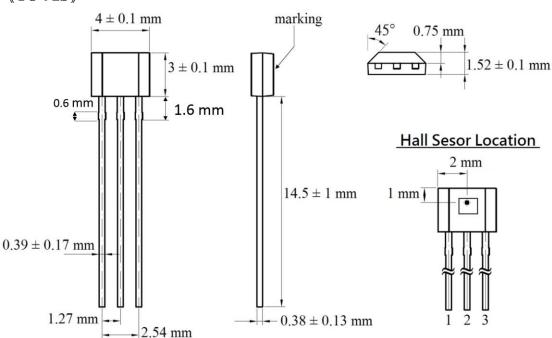









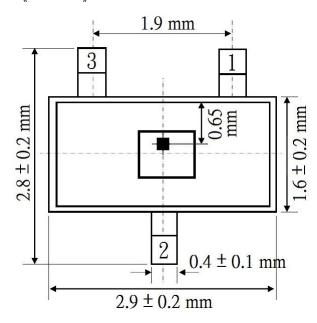

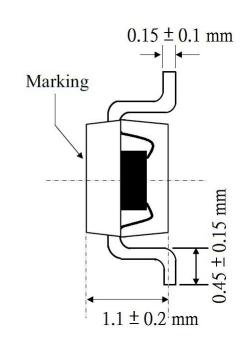


# **PCB Layout Reference View**

# SOT-23

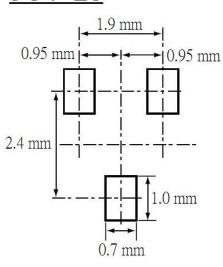



# TO-92S

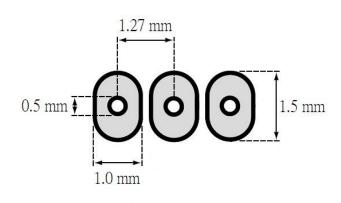





### **Characteristics Diagram:**

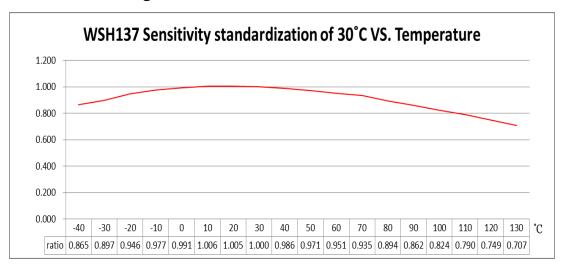


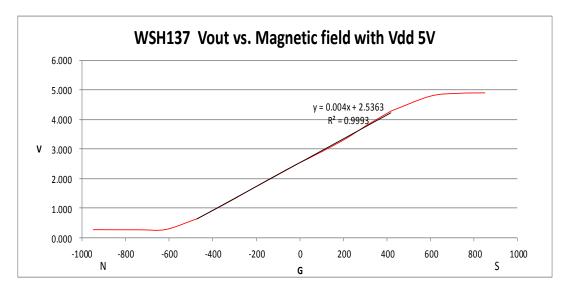


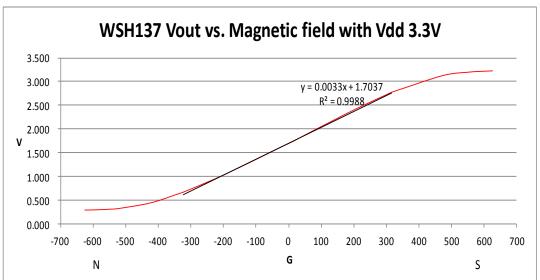



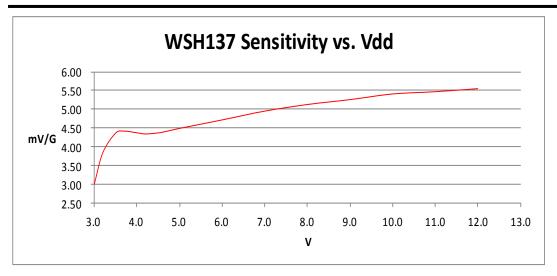

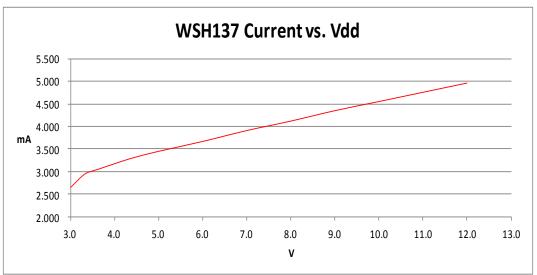

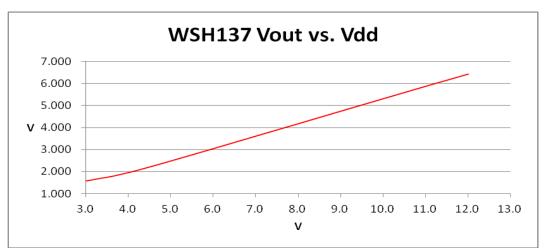

**Precautions for the use of Hall Sensor IC**: please refer to Winson Website-> Products->Application Note ->Hall Sensor IC Application Note: <a href="http://www.winson.com.tw/Product/83">http://www.winson.com.tw/Product/83</a>