

Hall Effect Sensor IC with Thermal Protection and Auto Restart Function

Features:

- Operate from 2.8V to 20V supply voltage.
- On-chip Hall sensor.
- Internal bandgap regulator allows temperature compensated operations and a wide operating voltage range.
- High output sinking capability up to 1.0A for driving large load.
- Lower current change rate reduces the peak output voltages during switching.
- Available in rugged low profile SIP-4L packages.
- Built-in protection diode for reverse power supply fault.
- Built-in thermal protection and auto-restart function.

General Description:

WSH416 is designed to integrate Hall sensor with complementary output drivers and frequency generator together on the same chip, it is suitable for high speed and large DC brushless motors. It includes a temperature compensated voltage regulator, a differential amplifier, a Hysteresis controller, two open-collector output drivers capable of sinking 1.0A current load . An on-chip protection diode is implemented to prevent reverse power fault. And built-in thermal lock protection and auto-restart function is suitable for super high speed fan. It can replace the function of lock protection and auto restart function. The power will be shutdown automatically at 125°C to prevent the coils be damaged and atuo-restart after cooling down.

The temperature-dependent bias increases the supply voltage of the hall plates and adjusts the switching points to the decreasing induction of magnets at higher temperatures. Subsequently, the open collector output switches to the appropriate state. WSH416 are rated for operation over temperature range from -40° C to 100°C and voltage ranges from 2.8V to 20V.

Pin Descriptions: SIP-4L

Name	P/I/O	Pin#	Description
Vcc	P	1	Positive Power Supply
OUT1	O	2	Output Pin #1
OUT2	O	3	Output Pin #2
Vss	P	4	Ground

Winson reserves the right to make changes to improve reliability or manufacturability.



Absolute Maximum Rating (at Ta=25° C)


Supply Voltage	Vcc -----	24V
Output breakdown Voltage	Vout -----	38V
Magnetic flux density	B -----	Unlimited
Reverse Protection Voltage	Vr -----	24V
Output Current continuous	Ic -----	600mA
Hold current	Ih -----	1.0A
Peak current	Ip -----	1.5A
Operating Temperature Range	Ta -----	(-40°C to +100°C)
Storage Temperature Range	Ts -----	(-65°C to +150°C)
Package Power Dissipation	Pd -----	500mw for SIP-4L

Electrical Characteristics: (T=+25° C, Vcc=2.8V to 20V)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Supply Voltage	Vcc	—	2.8	—	20	V
Output Saturation Voltage	Vout(sat)	Vcc=20V, Ic=200mA B > Bop	—	0.12	0.4	V
Output Leakage Current	Ileakage	Vcc=20V, B < Brp	—	<0.1	10	uA
Supply Current	Isupply	Vcc=12V, Output Open	—	25	30	mA
Output Rising Time	Tr	Vcc=12V, RL=820Ω CL=20Pf	—	3.0	10	us
Output Falling Time	Tf	Vcc=12V, RL=820Ω CL=20Pf	—	0.3	1.5	us
Output Time Differential	Δt	Vcc=12V, RL=820Ω CL=20Pf	—	0.3	3	Us
Temperature Protection	Tp		—	125	—	°C

Winson reserves the right to make changes to improve reliability or manufacturability.

Function Block:

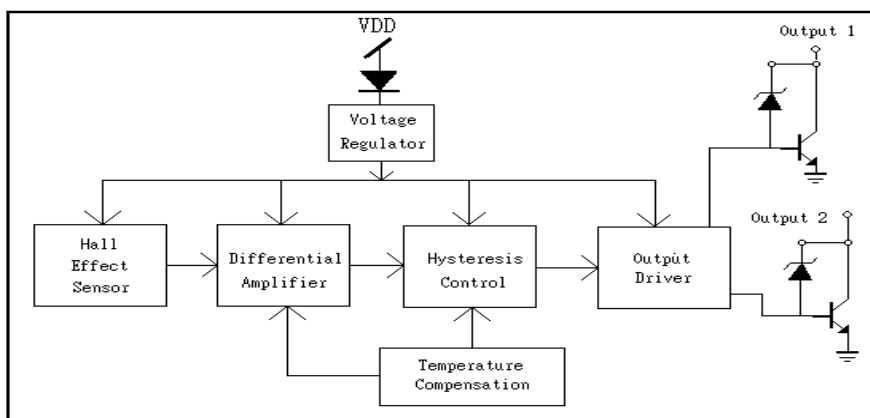

Magnetic Characteristics:


Characteristics	Symbol	Quantity	Ta= -20°C to +100°C			Unit
			Min	Typ.	Max	
Operate Point	Bop	Grade A		25	50	Gauss
		Grade B		30	70	
		Grade C		50	120	
Release Point	Brp	Grade A	-50	-25		Gauss
		Grade B	-70	-30		
		Grade C	-120	-50		
Hysteresis Window	Bop-Brp			40	200	Gauss

Order Information (Halogen Free)


WSH416-XPAN□ (TO-94)	1. (50 Gauss)
↑ Grade	2. (70 Gauss)
	3. (120 Gauss)

PS:
 1. (TO-94): 1,000pcs/bag
 2. (SOT-23/5): Tape&Reel, 1reel=3,000pcs

Winson reserves the right to make changes to improve reliability or manufacturability.

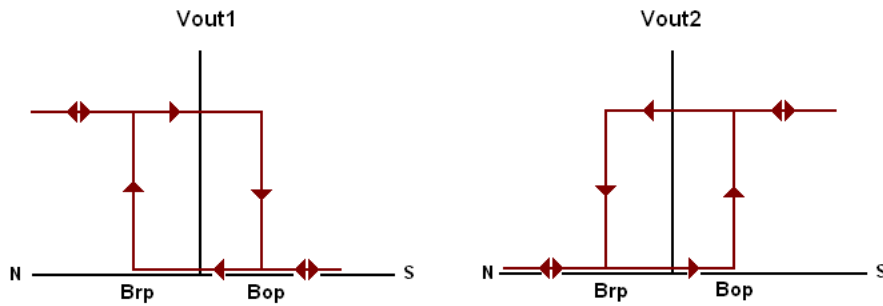


Package Information:

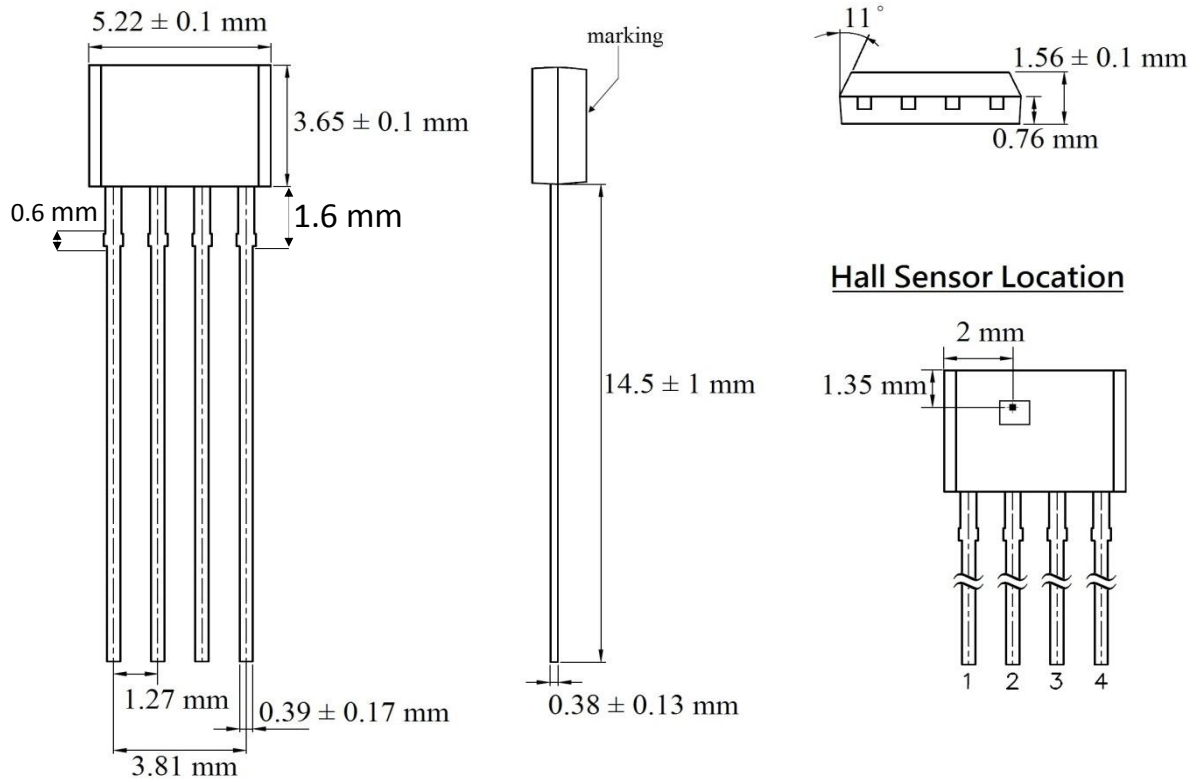

Winson reserves the right to make changes to improve reliability or manufacturability.

Application Circuit:

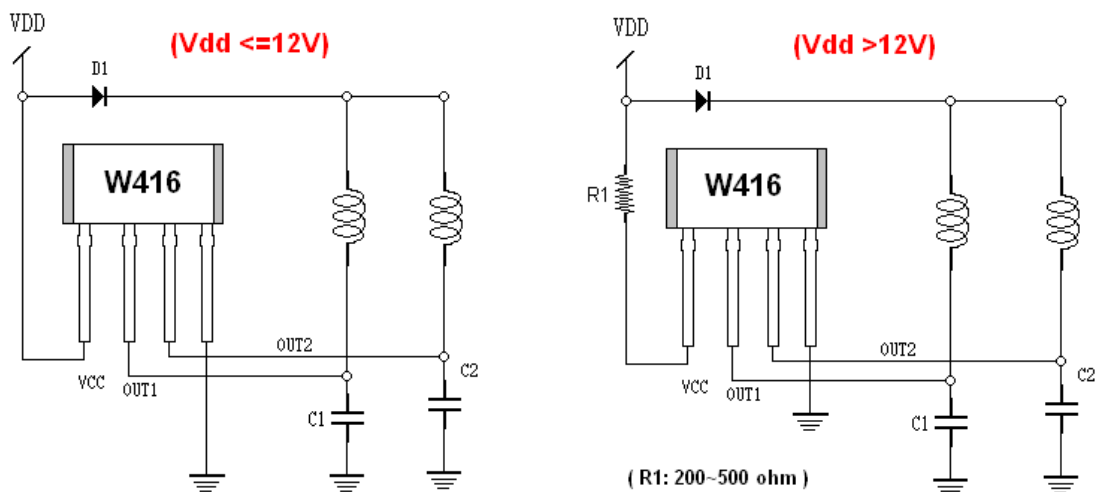

Precautions for the use of Hall Sensor IC: please refer to Winson Website->

Products->Application Note ->Hall Sensor IC Application Note:

<http://www.winson.com.tw/Product/83>

Winson reserves the right to make changes to improve reliability or manufacturability.